

ARX 45-2C

LIGHT TANDEM VIBRATORY ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

APPLICATIONS

- Small and medium construction sites
- Road maintenance
- City street repairs
- Confined work spaces
- Pathways
- Playgrounds, golf courses



PRODUCTIVITY

Smooth rolling

No sudden starts and stops during machine operation.

Compaction performance

Varied machine sizes ensure proper fits for the application and jobsite.

ERGONOMICS

The **operator platform** is designed for comfort, ensuring a pleasant experience no matter the duration of the shift.

The **operator station** offers 360° all-around machine visibility from the seat to maximize safety on the jobsite.

SERVICEABILITY

Low downtime

Robust design that protects components.

Reduced maintenance

Easy-to-reach maintenance points.

SUSTAINABILITY

ECOdrops

Improved efficiency, reduced use of fluids.

Advanced technologies

Machine usage controlled to bring efficiency, productivity – and enable precise documentation.

OPTIONAL EQUIPMENT

- Additional documentation printed
- Additional lights for hard canopy
- Additional Lights for ROPS
- Additional mirror
- Ammann Traction Control (ATC)
- AmmannCare Gold
- AmmannCare Silver
- Back-up alarm
- Back-up alarm adaptive
- CE conformity
- Certificate of origin
- Color scheme customer
- Compaction Measuring System ACE^{force}
- Drive lever additional left
- Edge cutter 45° (front right)
- Frame ROPS
- Hard canopy ROPS mounted
- Hard driving
- Hydraulic oil biodegradable
- Infrared thermometer
- Maintenance kit 1000h
- Maintenance kit 500h
- Maintenance kit 250h
- Maintenance kit 50h
- Overseas shipping preparation
- Registration plate holder
- Road lights
- Road lights incl. turn signals
- Scrapers combi tiltable
- Seat activation warning switch
- Seat belt 3"
- Seat options armrests
- Seat options seat heating
- Telematics ServiceLink Light
- Telematics ServiceLink Plus
- Toolset
- Transport accessories
- Warning beacon green LED
- Warning beacon LED for hard canopy
- Warning beacon LED for ROPS
- Warning beacon LED green for hard canopy
- Warning beacon permanently activated
- Water tank lock


STANDARD EQUIPMENT

- 2 amplitudes / 2 frequencies
- Ammann color design and decals
- Articulation joint with oscillation and offset
- AVC - Automatic Vibration Control
- Operator station with one drive lever (RH)
- One non-split drum / 4 tyres in rear
- Front and rear drive / front vibration
- Emulsion-spraying
- Open platform with safety handles
- Electronic drive lever
- Pressure water sprinkling with interval switch, 2 stage filtration
- Multi-functional display for machine overview
- Slideable and horizontally adjustable driver's seat
- Fixed scrapers
- Standard hydraulic oil
- Telematics ready
- On-board diagnostics
- Battery disconnection switch

AMMANN

ARX 45-2C

StV/T4f

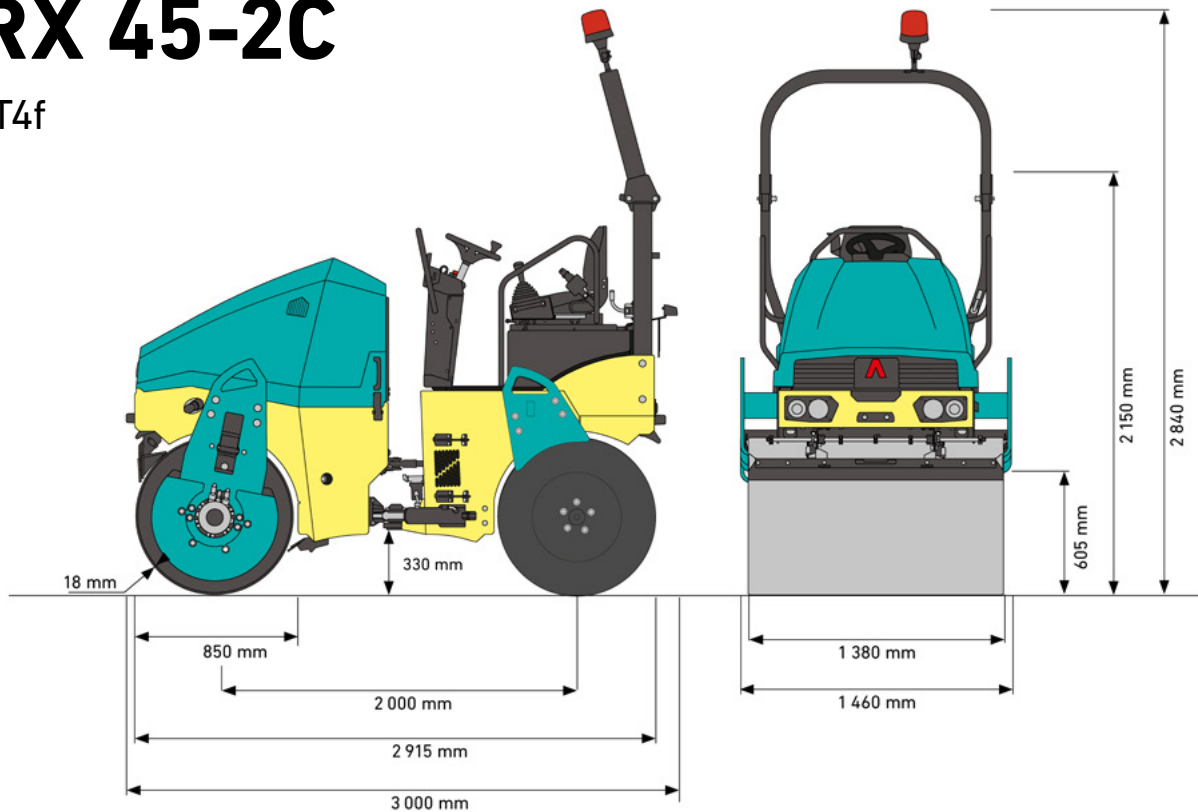

WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT CECE	4 185 kg (9,226 lb)
OPERATING WEIGHT MAX.	4 485 kg (9,888 lb)
STATIC LINEAR LOAD AVG.	16,3 kg/cm (91.3 lb/in)
MAX. WORKING SPEED	10 km/h (6.2 MPH)
GRADEABILITY WITHOUT VIBRATION	40%
GRADEABILITY WITH VIBRATION	30%
TURNING RADIUS (INNER)	2 670 mm (105.1 in)

ENGINE

MANUFACTURER	Kubota
ENGINE TYPE	D1803-CR-T
ENGINE SPEED	2400 rpm
POWER OUTPUT ISO 3046	32,8 kW / 44 HP
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4 Final
EXHAUST GAS AFTER-TREATMENT	EGR+DOC+DPF

COMPACTION FORCES

AMPLITUDE I	0,6 mm (0.024 in)
AMPLITUDE II	0,4 mm (0.016 in)
FREQUENCY I	41 Hz (2,460 vpm)
FREQUENCY II	55 Hz (3,300 vpm)
CENTRIFUGAL FORCE I	45 kN (10,116 lbf)
CENTRIFUGAL FORCE II	56,4 kN (12,679 lbf)
CENTRIFUGAL FORCE III	57,6 kN (12,949 lbf)

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	57 l (15.1 gal)
WATER TANK CAPACITY	340 l (89.8 gal)
ANTI-ADHESIVE TANK	18 l (4.8 gal)
TYPE OF WATERING	Pressure
HYDRAULIC TANK CAPACITY	53,5 l (14.1 gal)
STEERING ANGLE	±35°
OSCILLATION ANGLE	±9°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	77 Ah
NUMBER OF WHEELS	4 pcs
SIZE OF TIRES	10.5/80-16
WHEEL LOAD	488 kg (1,076 lb)

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	N/A
SAND / GRAVEL	250 mm (9.8 in)
MIXED SOILS	180 mm (7.1 in)
SILT	N/A
CLAY	N/A
STABILISATION	120 mm (4.7 in)
ASPHALT	100 mm (3.9 in)