

ARX 110C

ARTICULATED TANDEM ROLLER

EU Stage V / U.S. EPA Tier 4f



A 2-IN-1 ROLLER

The Ammann ARX 110C Combination Tandem Roller provides the benefits of vibratory and pneumatic compactors in a single machine while meeting EU Stage V / U.S. EPA Tier 4f emissions standards. The optional ACE^{force} system provides a host of benefits including measurement and documentation, evaluation of material stiffness, operator guidance and documentation. The comfortable cab helps the operator stay focused throughout the shift and ultimately improves your jobsite productivity.

PRODUCTIVITY

Multiple vibratory frequencies

Varied vibratory settings adjust compaction output for even more precise compaction control and higher quality

Advanced articulation joint

Permanent contact with the surface and a wide range of working widths maximises productivity

Machine customisation

Options make the machine a perfect match for diverse jobsites and varying customer needs

ERGONOMICS

Multi-functional display

The central display is located in front of the operator for optimal machine control and monitoring

Intelligent functions

Integrated advanced functions make machine more operator friendly, intuitive and safe

Operator station

An intuitively organized, fully adjustable operator station has all controls located within easy reach

SERVICEABILITY

Accessible engine compartment

Tool-free, wide-opening side doors on the engine compartment

Easy-to-reach maintenance points

All service points are conveniently located for easy access

Self-diagnostic system

The on-board, automated diagnostic system quickly identifies potential problems

APPLICATIONS


- Medium and large compaction sites
- Transport construction
- Municipal and town roads
- Motorways
- Airport runways
- Housing developments
- Industrial zones
- City centers

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

	Sand / Gravel	Mixed Soils	Silt	Clay	Stabilisation	Asphalt
ARX 110C	0.32 m (13 in)	0.22 m (9 in)	-	-	0.17 m (6.7 in)	0.13 m (5.1 in)

AMMANN

TECHNICAL SPECIFICATIONS
ARX 110C ARTICULATED TANDEM ROLLER
EU Stage V / U.S. EPA Tier 4f

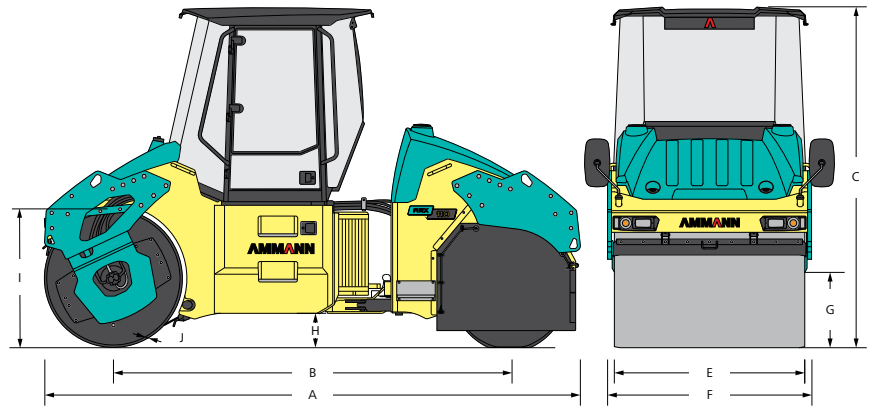

DIMENSIONS

Label	Parameter	Value
A	Machine length	4720 mm (185.8 in)
B	Wheelbase	3500 mm (137.8 in)
C	Machine height	3000 mm (118.2 in)
E	Drum width	1680 mm (66.1 in)
F	Machine width	1800 mm (70.9 in)
G	Side clearance	780 mm (30.7 in)
H	Ground clearance	300 mm (11.8 in)
I	Drum diameter	1220 mm (48.0 in)
J	Drum shell thickness	22 mm (0.9 in)

COMPACTION FORCES

Frequency I	38–42 Hz (2280–2520 VPM)
Frequency II	43–52 Hz (2580–3120 VPM)
Amplitude I	0.82 mm (0.032 in)
Amplitude II	0.35 mm (0.014 in)
Centrifugal force I	54–78 kN (12 140–17 535 lbf)
Centrifugal force II	98–120 kN (22 031–26 977 lbf)

WEIGHT & OPERATING CHARACTERISTICS

Operating weight	10 340 kg (22 800 lb)
Operating weight max.	11 810 kg (26 040 lb)
Stat. lin. load of front drum	31.2 kg/cm (174.7 lb/in)
Max. transport speed	10.5 km/h (6.5 MPH)
Gradeability with / without vibr.	25 % / 30 %
Turning radius inner (edge)	5470 mm (215.4 in)
Drum offset	170 mm (6.7 in)

MISCELLANEOUS

Brakes operating	Hydrostatic
Brakes parking	Mechanical multiple-disc
Brakes emergency	Mechanical multiple-disc
Fuel tank capacity	220 l (58.1 gal)
Water tank capacity	840 l (222 gal)
Anti-adhesive tank	28 l (7.4 gal)
Tire size	11,00x20"16PR
Voltage	24 V

ENGINE

Manufacturer	Deutz TCD3.6 L4
Power output ISO 14396	74.4 kW (100 HP)
Maximum torque	410/1600 Nm (ft lb)/rpm
Emmission class	EU Stage V / U.S. EPA Tier 4f
Exhaust gas after-treatment	EGR+DOC+DPF+SCR

STANDARD EQUIPMENT

- CE conformity
- ROPS/FOPS Open platform with Plastic roof
- Pressure water sprinkling with interval switch, 3 stage filtration and 2 pumps
- Combi-version: One non-split drum / 4 tyres in rear
- Combi-version: Front and rear drive and front vibration
- Combi-version: Incl. Emulsion-spraying and Thermal aprons
- Lockable articulation joint with Oscillation and Offset (Crab mode)
- Foldable scrapers
- 2 amplitudes / Multiple frequencies
- Operator's station with one drive lever (RH)
- 170° Slideable, rotatable and horizontally adjustable driver's seat with armrests
- Multi-functional display for machine control and overview
- Adjustable Steering column
- Road lights (headlights, rearlights, turning signals, brake lights)
- Telematics Ready
- On-Board diagnostics
- Centralized draining points

OPTIONAL EQUIPMENT

- Cab with ROPS/FOPS
- Air condition
- Additional Lights 360° LED
- Warning beacon
- Combi roller - Unsplitted drum with HF
- Infrared thermometer
- Compaction Measuring System ACE^{force}
- Chip Spreader Ammann
- Edge cutter
- Rear view camera
- Telematics System ServiceLink (3 Years)
- GPS Q-Compaction
- Backup alarm
- Bio-degradable hydraulic oil
- Customer color
- Sun Films on glasses